



### Introduction

The **XANTKIT-EU** consists of 3 (three) products that allow you to extend the ISM (RSI radio) range of our devices.


This kit is valid for the XT200 and XV200 only.

### Kits

The first cable is a MMCX-to-SMA connector that plugs directly into the MMCX connector of the XT200 or XV200.

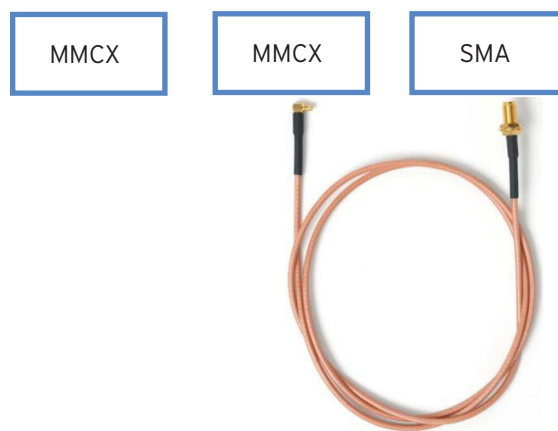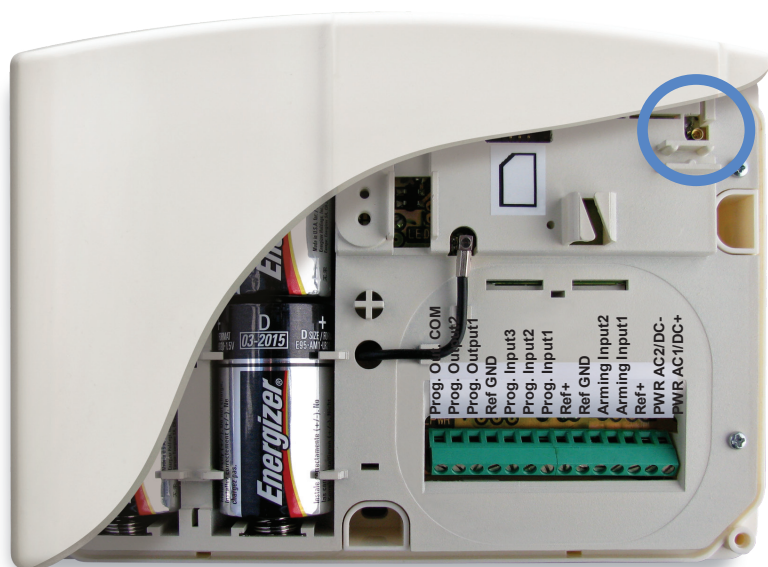

The second and third components are a SMA-to-BNC converter and the actual antenna that comes with a 2.5m BNC-to-BNC cable.

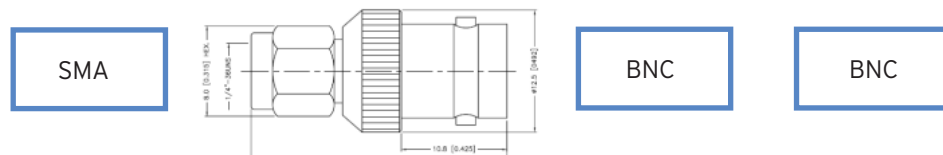


The antenna has the following characteristics and is provided in the 868MHz range.

	Characteristics	MIN	TYP	MAX	UNIT
Fw	Working frequency		433.92 or 868.3		Mhz
Zi	Impedance		50		$\Omega$
	Body		Aluminium		
	Radials		Chromium-plated brass		
	50 $\Omega$ Coaxial cable		2.5		mt
	BNC connector		on request		
	Mounting bracket		187 x 33 x 30		mm
Top	Operating temperature range	-20		+80	°C

## Programming

The external RSI radio antenna must be enabled under Configuration // General Parameters accessible at level 4 only.

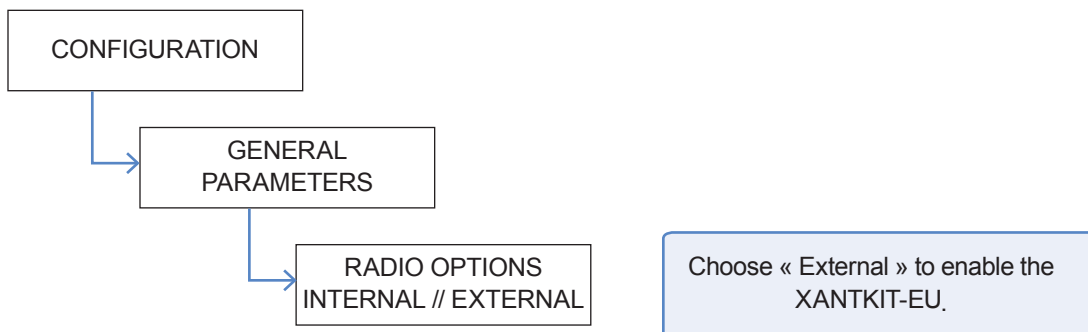

### EMEA SALES

23, avenue du Général Leclerc  
92340 BOURG-LA-REINE  
FRANCE  
E-Mail : [emeasales@rsivideotech.com](mailto:emeasales@rsivideotech.com)

### North American Headquarters

4455 White Bear Parkway, Suite 700  
White Bear Lake, MN 55110  
USA  
E-Mail : [usasales@rsivideotech.com](mailto:usasales@rsivideotech.com)