

1044TW-N

Industrial surface mount magnetic contact, extra wide gap, white

Industrial Surface Mount Contact

The Sentrol 1045T series features a wider make distance, which permits faster installation, accommodates greater misalignment and works better on steel without time-consuming brackets. A wider break distance helps prevent false alarms caused by loose fitting doors. Sentrol-specified contacts keep the 1045 series from sticking or freezing on seldom-used doors.

Applications

The contacts are used to protect openings such as metal entry/exit doors, overhead doors, roof hatches or hinged skylights.

Durability and dependability

The Sentrol high performance magnetic contacts have been designed to facilitate installation and ensure durability and dependability. Most are conservatively rated at 10,000,000 cycles, guaranteeing a long life. Every reed connection is hand soldered and each magnetic contact is tested before they leave the factory, 100% of the time.



Details

- Designed for commercial and industrial applications
- Can be used on steel without brackets
- Rugged construction
- Mounting screws
- Concealed terminals resist tampering and inadvertent shorting

1044TW-N

Industrial surface mount magnetic contact, extra wide gap, white

Technical specifications

General


| | |
|------------------|------------------|
| Application type | Surface mount |
| Contact type | SPDT |
| Connectivity | screws terminals |

Wired / wireless

| | |
|----------------|--------------|
| Wired-wireless | Wired |
| Operating gap | 76 mm (max.) |

Physical

| | |
|---------------------|-----------------|
| Physical dimensions | 99 x 15 x 18 mm |
| Colour | White |

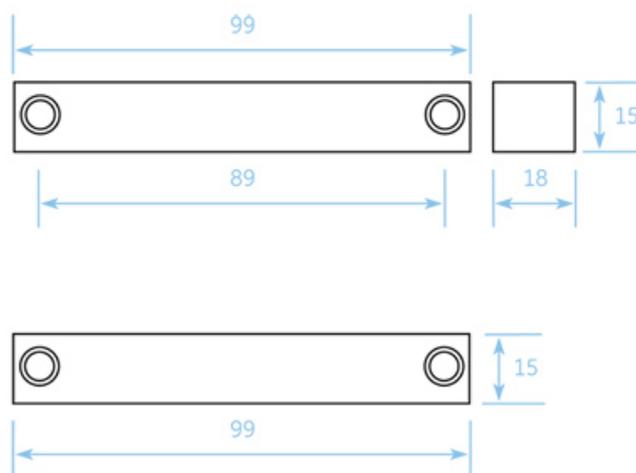

As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 5 May 2023 - 9:53