

# WATERBUG®

## Accessory Sensors

### Detection

Water Sensor Surface (unsupervised)

Water Sensor Under Carpet (Unsupervised)

### Model Number


W-S-U

W-UC-U



## Electrical Water Detection offers wide area coverage

- Connects to any hard wire or wireless system.
- Hardwire powered.
- Includes one standard surface sensor unsupervised (W-S-U).
- Connect up to 6 sensors wired in parallel up to 100' (30.5 m) using 18-22 AWG twisted pair.
- Can be used to detect absence of water.
- Will not alarm due to condensation or humidity.
- Designed to detect nonflammable conductive liquids (distilled water cannot be detected).

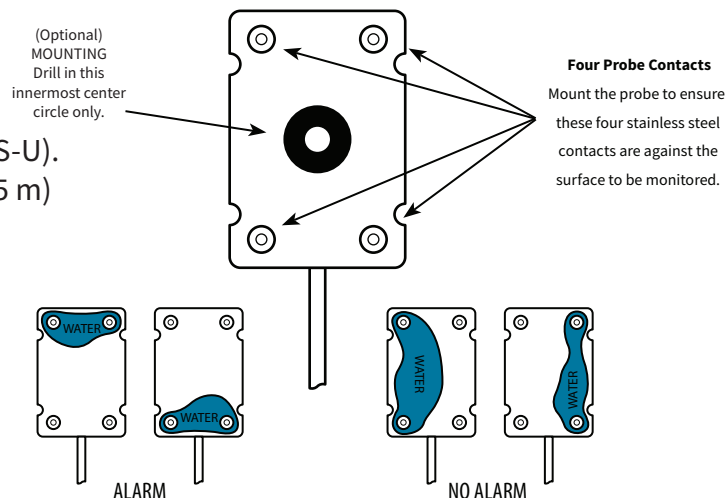

## Specifications

Current Draw	12-24 VDC @ 35mA or 12-24 VAC @ 100 mA
Operating Range	Console and sensor 32 to 140°F (0 to 60°C)
Output	1 Form C Relay (N.O./N.C.) 1 Amp @ 30 VDC, resistive or 1 Amp @ 24 VAC, resistive
Sensor Included	1 Standard surface sensor unsupervised (W-S-U)
Max Distance Sensor/Console	1-2 sensors; max 200' (61 m) 3-6 sensors; max 100' (30.5 m) per sensor
Console Dimensions	4.1 x 2.36 x 1.18" (10 x 6 x 3 cm) (with flanges)
Sensor Dimensions	3.0 x 2.0 x .88" (5.1 x 7.6 x 2.2 cm)
Weight	2.4 oz. (0.7 g)
Mounting	Mounting flanges



Visit [www.winland.com](http://www.winland.com), call 800.635.4269 or email [techsupport@winland.com](mailto:techsupport@winland.com) to learn more.

424 North Riverfront Drive, Suite 200 • Mankato, MN • 56001 • 800.635.4269 • [www.winland.com](http://www.winland.com)