



## YF360A-2/SA2



Applicable camera (model) 1 2/3 1/2 1/3 1/4

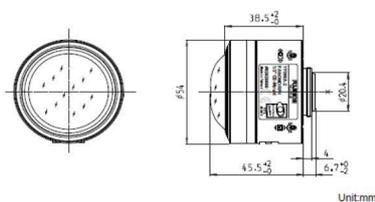

- Features**
- 360° view eliminates blind spots
  - Optimized design for VGA to 2 Megapixel sensors both analog and IP cameras
  - Standard CS Metal Mount for 1/3" sensors
  - Equipped with 3 axes sensor centering adjustment
  - ImmerVision Enables® SDK available for DVR/NVR/VMS integration
  - Patented panomorph optical technology

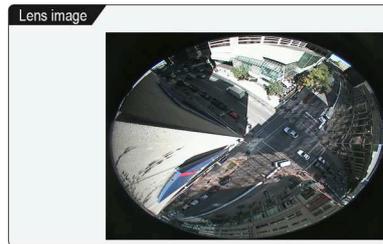

	Applicable to 1/3	Applicable to 1/3
	YF360A-2	YF360A-SA2
Focal length in mm	0.9 (short axis) / 1.15 (long axis)	0.9 (short axis) / 1.15 (long axis)
Iris range	F1.9 (short axis) / F2.4 (long axis)	F1.9 (short axis) / F2.4 (long axis)
Operation	Focus	manual
	Iris	none (open iris)
Angle of view ( H x V )	182° x 182°	182° x 182° *
Anamorphic ratio	1.3 (4:3)	1.3 (4:3)
Focusing range (from front of the lens)	infinity ~ 20 mm	infinity ~ 20 mm
Mount	CS	CS
Mass in g	180	180
Remarks	ImmerVision Enables RPLAONKV	

\*1: The iris automatically closes when the camera is turned off.

### FUJIFILM Europe GmbH

Heesenstr. 31, 40549 Düsseldorf, Germany  
 Tel.: +49 211-50 89 0, Fax: +49 211-50 89 89 00  
 www.fujifilm.eu/fujinon, cctv@fujifilm.eu