Junction Box

Grade 3 Class II

Large 24 (22+2) way
Junction box with tamper

Features

ADIJB-G3C2-24-W

GRADE 3 CLASS II

- 2 x 12 wire screw-down terminal strips
- 2 Terminals dedicated to tamper switch
- 8 rear cable entry holes
- 4 End knock outs
- TACT Microswitch Tamper
- Dimensions: 125mm x 100mm x 51mm
- Temperature Range: -40 to +50°C
- 3 Years Warranty

UPC: 840049308220

PART #: ADIJB-G3C2-24-W

For more information contact your ADI sales person or visit us at www.adiglobal.com

Rev: June 23

Junction Box

ADIJB-G3C2-24-W

Connections Diagram

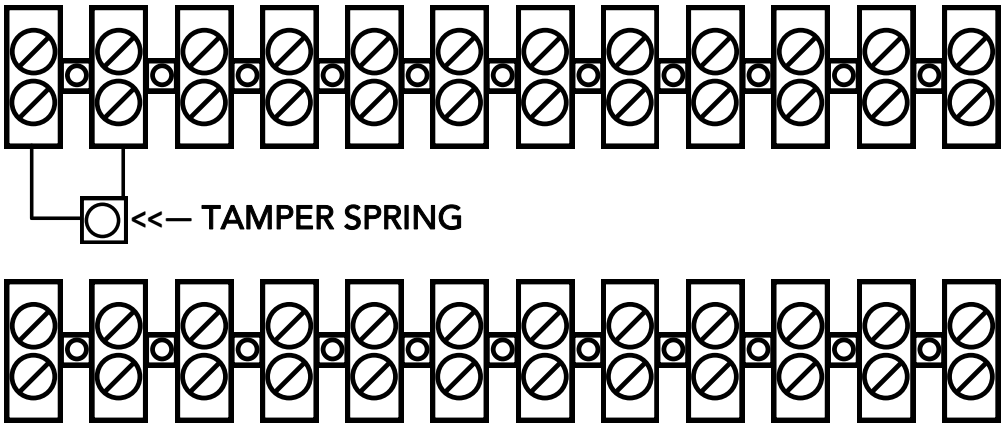

Installation

Open the Junction box by removing the lid screws and lifting the lid from the base.

Drill appropriate fitting holes to the surface the junction box will be mounted to. Use screw anchors if the surface requires them.
Wire as appropriate, ensuring the tamper circuit is connected to the receiving panel for graded installations. The lid tamper is provided by the microswitch fitted to the base.
Screw the base to the mounting surface. Ensure all connections are OK. Fit the lid to the base and replace both lid screws.

Power rating: 125V DC 230V AC 3A max. current

Rev: June 23