


Product Code

F01412

7" WAY KIT MONITOR 1

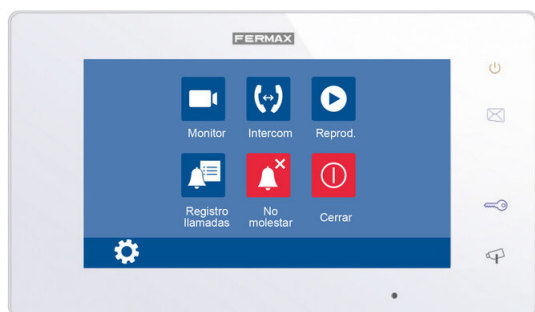

Reference

1412

EAN

8424299014128

Description.

Description

New Way Monitor.

Choose among 20 different melodies, customise the monitor's settings, record videos and capture images of your visits.

- Intercom: Establish communication with another installed monitor inside the house.
- Playback: After 3 seconds the monitor automatically records a video (in case there is a micro SD Card installed) or a picture (in case there isn't) of the visitors. While answering, you also have the option to manually take a snapshot of your visit. The recorded videos/pictures from the outdoor panel will be played on the screen.
- Settings: Brightness, contrast, selection of melodies, date & time, scene mode (brightly, soft and user), ring volume for day time and night time, language selection (16 different), etc.
- Do not disturb: 1 hour, 8 hours or always.
- Call record: All the calls from panel-to-monitor, monitor-to-monitor and between monitors will be recorded and can be reviewed afterwards.
- Touch screen: Digital TFT colour monitor with capacitive touch screen that facilitates an intuitive use.

Technical Details

Monitor Specifications:

- Power supply for monitor: DC 24~28V.
- Power consumption: Standby 12mA; Working 350mA.
- Monitor screen: 7 Inch digital colour TFT.
- Capacitive touch screen.
- Video signal: 1 Vpp, 75Ω, CCIR standard.
- Wiring: 2 wires, no polarity.
- Dimensions: 225(W) x 131(H) x 18(D)mm.
- Operating temperature: [-20°C, +55°C]

Details.

Product measurements (height x width x depth) mm	Weight (kg)	Packaging measurements (height x width x depth) cm	Video Door Entry system Technologie
131x225x18	0.6523	4x24,2x16,5	WAY

Manuals

- 97833g_Anadir_Monitor_Secundario_KIT_WAY_V06_17.pdf
- 97833lKg_Anadir_Monitor_Secundario_KIT_WAY_V06_17.pdf

Declaration of conformity

- DOCF01412EN.pdf